参考資料

SC-30X & SC-31X USER MANUAL

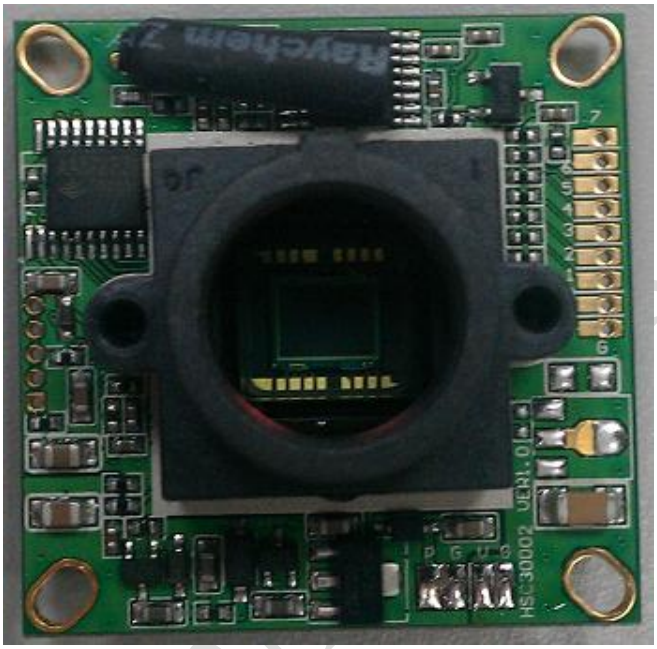

MODEL : SC-30X & 31X
PCB Ver. : V1.0
HW RD : Jack(鄭亦翔)
WRITER : Usher(郭宗翰)

RELEASE	APPROVED	DESIGNER
2013/10/22		

History

Rev.	Released Date	Updated Information	Written by
1.0	10/3	User Manual Create	Usher
1.1	10/22	Content	Usher/Charon

www.sunmore.com

6F, NO.76, ZHOU-Z ST., 114 NAI-HU, TAIPEI, TAIWAN
886-02-8797-3566

CONTENTS

Specification 3
PCB Top View & Mechanical Drawing 5
IO Port 7
Q&A 8

www.sunmoretek.com

Specification

Model	SC-300 NM0		SC-301 NM0
Sensor	NTSC		PAL
	1/3 inch CCD Image Sensor		
Power / Video Connector Type	4 pin / 1.25 mm		3 pin / 1.5 mm
Effective Picture Elements	510(H) X 492(V)		500(H) X 582(V)
Lens	Selectable / Default : 3.6mm, Compatibility: 6mm (F2.0) fixed lens / CS MONUT / VARI FOCAL 3.5~8 mm		
D/N (Color/Mono switch)	Auto		
Auto Gain	Yes		
Gamma	0.45		
	MIN	TYP	MAX
PCB size	31.85 * 31.85 mm	32 * 32 mm	32.15 * 32.15 mm
Horizontal Resolution		380 TV lines	
Minimum Illumination (F2.0 Lens)		0.1 Lux	
Electronic Shutter	1/60 (1/50)	Auto	1/100,000
ATW	3200K	Auto	10500K
S/N Ratio	52dB		
Video Output		Composite 1 Vp-p 75 Ohms	
Power	DC 10.8V	DC 12V	DC 13.2V
Power Consumption	85mA(@13.2V)	90mA	95mA(@10.8V)
Operating Temperature	-10℃		50℃
Storage Temperature	-20℃		60℃
Operating Humidity			80% RH
Storage Humidity			90% RH

6F, NO.76, ZHOU-Z ST., 114 NAI-HU, TAIPEI, TAIWAN
886-02-8797-3566

Model	SC-310 NM0		SC-311 NM0
Sensor	NTSC		PAL
	1/3 inch CCD Image Sensor		
Power / Video Connector Type	4 pin / 1.25 mm		3 pin / 1.5 mm
Effective Picture Elements	510(H) X 492(V)		500(H) X 582(V)
Lens	Selectable / Default : 3.6mm, Compatibility: 6mm (F2.0) fixed lens / CS MONUT / VARI FOCAL 3.5~8 mm		
D/N (Color/Mono switch)	Auto		
Auto Gain	Yes		
Gamma	0.45		
	MIN	TYP	MAX
PCB size	31.85 * 31.85 mm	32 * 32 mm	32.15 * 32.15 mm
Horizontal Resolution		380 TV lines	
Minimum Illumination (F2.0 Lens)		0.1 Lux	
Electronic Shutter	1/60 (1/50)	Auto	1/100,000
ATW	3200K	Auto	10500K
S/N Ratio	52dB		
Video Output		Composite 1 Vp-p 75 Ohms	
Power	DC 10.8V	DC 12V	DC 13.2V
Power Consumption	75mA(@13.2V)	80mA	85mA(@10.8V)
Operating Temperature	-10℃		50℃
Storage Temperature	-20℃		60℃
Operating Humidity			80% RH
Storage Humidity			90% RH

WW

PCB Top View & Mechanical Drawing

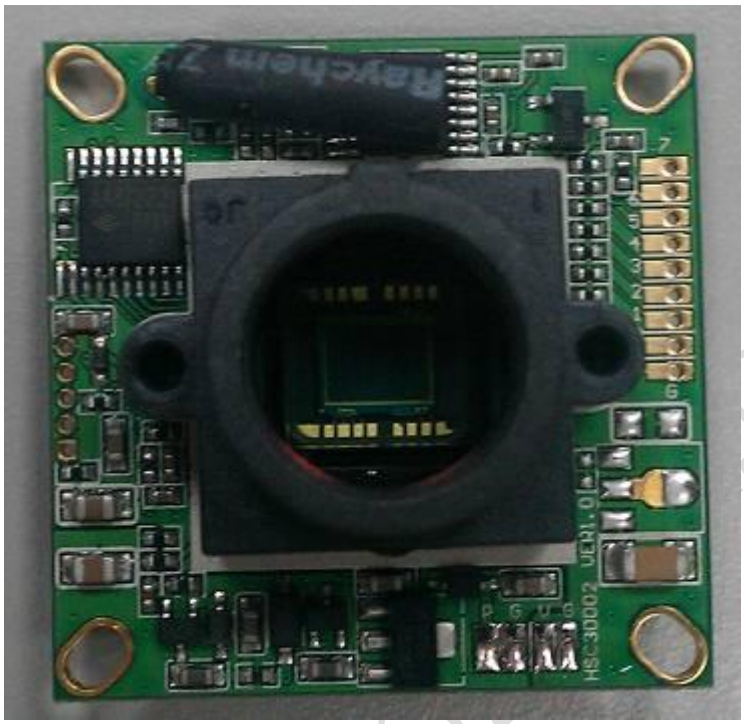

TOP

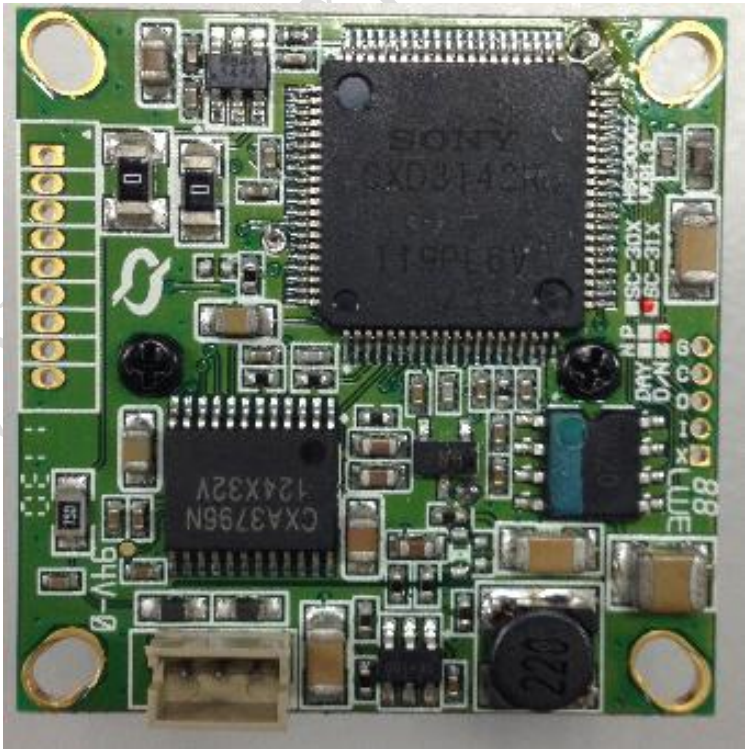

Bottom

www.[illegible].com

6F, NO.76, ZHOU-Z ST., 114 NAI-HU, TAIPEI, TAIWAN
886-02-8797-3566

Mechanical drawing

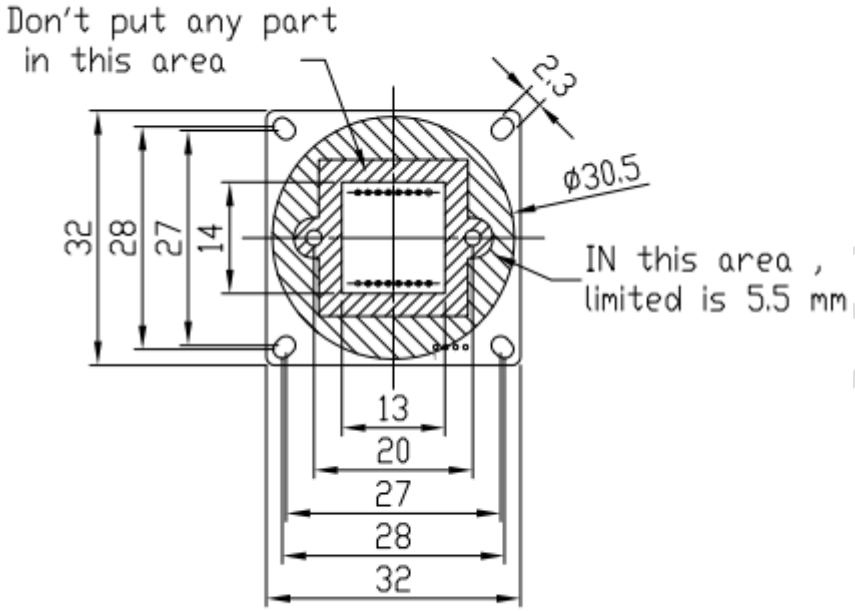

Top View

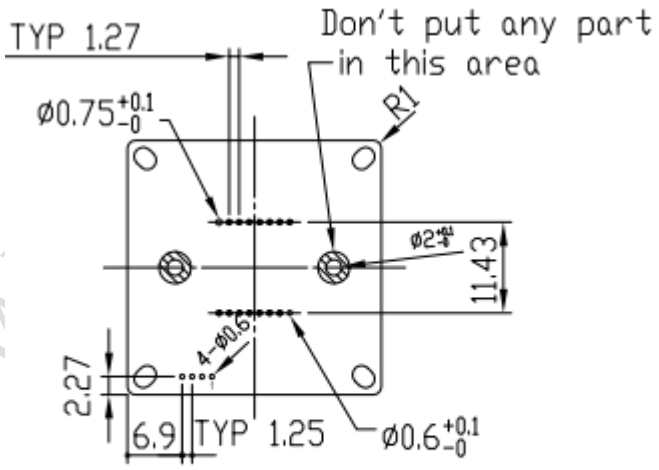

Bottom View

IO Port

- CN3: Power & Video Out Connector 4P (NTSC: p1.25mm)
- CN3: Power & Video Out Connector 3P (PAL: p1.50mm)

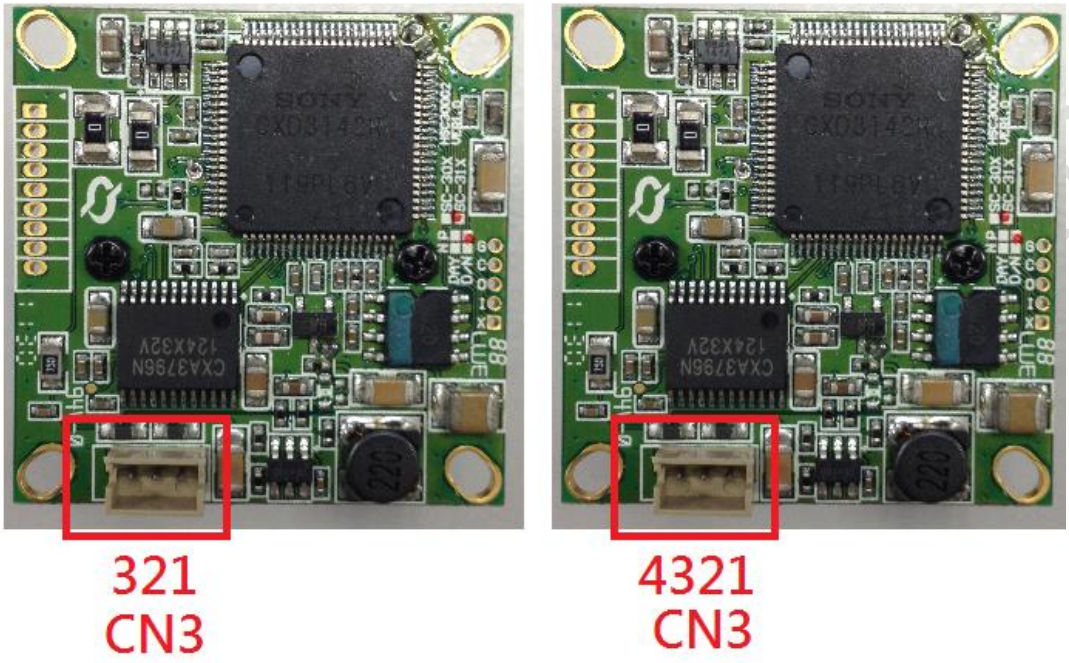

SC-300_310
CN3 (NTSC 4P, pitch 1.25mm, DIP)

No	Pin Name	I/O	Description
1	DC_12V	P	DC 12V Input
2	PGND	G	Ground
3	VIDEO	O	Video Output
4	VGND	G	Ground

SC-301_311
CN3 (PAL 3P, pitch 1.5mm, DIP)

No	Pin Name	I/O	Description
1	DC_12V	P	DC 12V Input
2	PGND	G	Ground
3	VIDEO	O	Video Output

Q&A

Q1. How to effectively make Day & Night module into Day Module ?
Use Lens with IR Coating to block the Infrared light.

Q2. How to enlarge 32x32 size PCB to 38x38 size ?
Use 32 to 38 conversion frame.

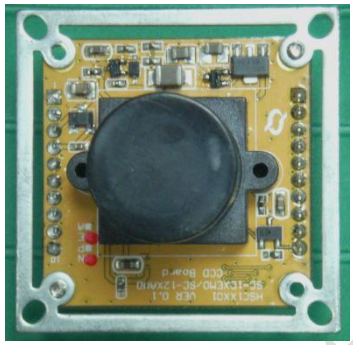

Q3. Issue on blurred image or poor image resolution
Check if the surface of the sensor or the top & bottom side of the lens are contaminated, use micro-denier to clean all the contaminants if necessary.
Also it could be image out of focus, please adjust the focus of the lens.

Q4. Can not achieve the best focus
Change the height of the lens holder if focus can not be met.
Adjust the lens to make it closer to the sensor, if you still see the blurred image, please change a lower height lens holder.
Adjust the lens to make it far away from the sensor, if you still see the blurred image, please change a higher height lens holder.

Q5. Why the color I see on the TV seem not to be correct?
For some circumstances (light source include IR), the color of the object might be influenced by the IR.

Q6. How do I deal with color rolling?
Please select modules which has auto iris function and use direct drive type auto iris lens.

www.sunmoretek.com

Q7. How do I select Lens Holder?

The lens holder screw hole spacing is 20mm. Please refer to the figure below for the holder size (inner & outer) (length 19.7~14mm: width 18.8~13mm)

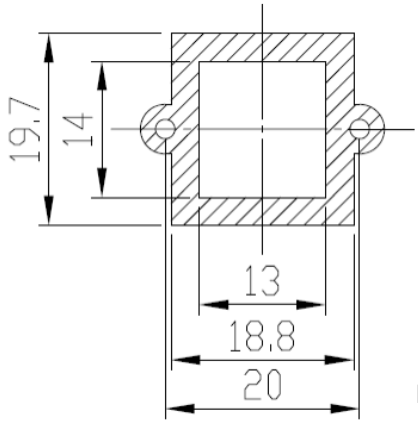

Q8. If I want to use CS mount lens, what should I do?

Use CS mount lens holder, please refer to the follow figure.

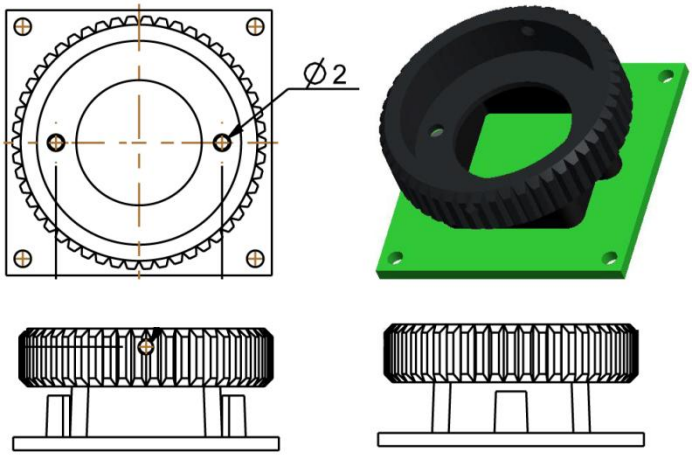

Q9. The connection method for the power/video port?

Please refer to the "power/video port" section.

Q10. How to select IR LED?

Please use the IRLED with peak wavelength at around 850nm.

Q11. The effect of IRLED is not obvious?

(1) Your must use D/N type module (with D&N OLPF attached on the sensor)

(2)Your IRLED peak wavelength must be 850nm

www.e-tek.com

Q12. How to increase the visible distance when using IRLED at night?

(1) Increase the number of IRLED
(2) Use lens with larger iris (smaller F-number)

Q13. How to externally control the video D/N mode from color to mono when IRLED is switched ON?

Please select the module which has D/N mode input port, for detail, please contact module distributors.

Q14. Suggestions on the PCB screws

We suggest you to use M2*4 Machine Screw or (phi)2*4 self-tapping screw.

www.sunmoretek.com